## Easy Cut. 5000/6000

# Safe Cutting Instructions





11333 Pagemill Road Dallas, TX 75243 Toll Free: 800-527-4609

## Easy Cut<sub>m</sub> 5000/6000

### **Features**



#### Removing the blade:

CAUTION: BLADES ARE SHARP, TAKE PROPER CARE WHEN HANDLING.


Engage the trigger lock and squeeze the trigger to expose blade. (Fig 1)

Using your index finger, press the blade release button and hold while you are removing the old blade. (Fig 2)

Dispose of blade properly. **Do Not Discard** in Trash!







#### Installing the blade:

Engage the trigger lock and squeeze the trigger. (Fig 1)

Do not press blade release button during this procedure.

Slide a new blade into the slot until you hear an audible click. (Fig 2)

Confirm proper installation be extending the blade and pulling slightly on the blade to confirm it is locked into position







#### **How to hold your Easy Cut Cutter**

Hold the cutter at the front with your thumb and forefinger, with your thumb running parallel with the body of the cutter. Your forefinger is on a 90 degree angle with the body of the cutter covering the opposite side. All of the pressure to hold the cutter is at this point. The remaining three fingers wrap gently around the trigger. The focus is on the pinky finger. You should engage the blade by squeezing the trigger with the pinky finger. The other two fingers can lay gently on the trigger.

Squeeze the trigger with the pinky finger with the other two fingers lying gently on the trigger.






#### **Cutting Posture:**

**IMPORTANT:** Always center cut on your body for most types of cuts. When holding the box, place your opposite hand away from the cutting area and use it to support the box you are cutting. (Fig 1)

This is the safest method for tape cuts, top cuts, window cuts and tray cuts.

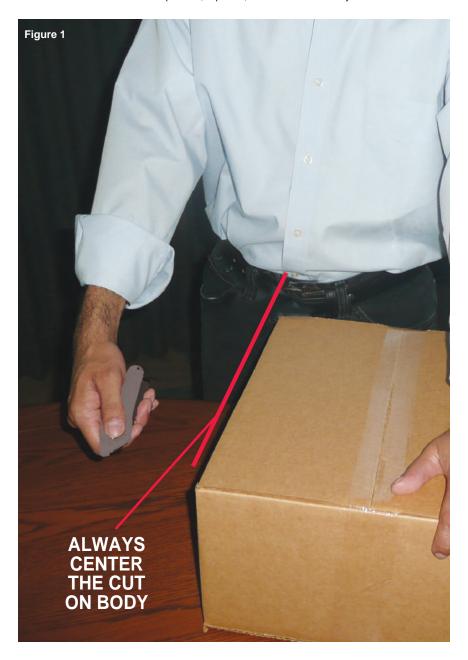

#### **Stretch Wrap**

Starting a few inches from the uppermost section of stretch wrap, pull the blade downward through the stretch wrap (fig 1). When you get to the bottom, return to the top and finish the last few inches. The purpose of the stretch wrap remaining at the top is that it holds tension on the stretch wrap till you get it cut all the way to the bottom (Fig 2).







#### **Tape Cut**

**IMPORTANT:** Cut both taped ends as shown (Fig 1,2). Using your index finger, lift up the end and hold tension away from the merchandise while cutting down the center of the box. (Fig 3)

