



TempU 04 Temperature Data Logger Operating Instructions

1. Start Recording

Press and hold the PLAY (\blacktriangleright) button for approximately 3sec. The 'OK' light is on and the (\blacktriangleright) or (WAIT) indicates the logger is started.

2. Mark

When the device is recording, press and hold the PLAY (▶) button for more than 3sec, and the screen will switch to the 'MARK' interface. The number of 'MARK' will increase by one, indicating data was marked successfully. (Note: One record interval can mark one time only, the logger can mark 6 times in one recording trip. Under status of start delay, the mark operation is disabled.)


3. Stop Recording

Press and hold the STOP (■) button for more than 3sec until the 'ALARM' light is on, and the STOP (■) symbol displays on the screen, indicating stopping recording successfully. (Note: If the logger is stopped during the status of start delay, a PDF report is generated when inserted into PC but without data.) During normal recording process, shortly press PLAY (►) to switch to different display interface.

The interfaces shown in sequence are respectively: Real-time Temperature > LOG > MARK > Temperature Upper Limit > Temperature Lower Limit.

4. Get Report

Connect logger to PC via USB, and it will auto-generate PDF and CSV file.

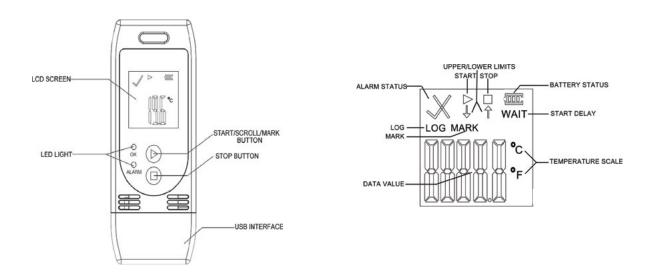


PLEASE NOTE: If the device is used for the first time or after re-configuration, the real-time temperature interface will be the initialisation interface. Real-time temperature interface is updated every 10sec.





LCD Display Instructions

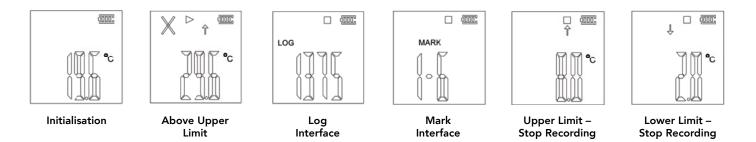

•	Data logger is recording
•	Data logger has stopped recording
WAIT	Data logger is in Start Delay status
\checkmark	Temperature is within the limited range
igma and $ightarrow$	Measured temperature exceeds its upper limit
igma and $igcup$	Measured temperature exceeds its lower limit

