





OpsWatch Shock/Vibration Monitor Competitive Comparison

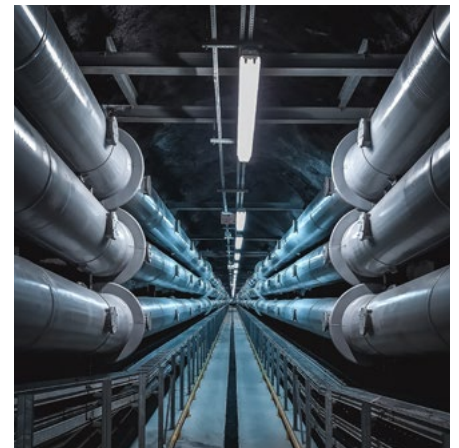

The OpsWatch monitoring system delivers real-time vibration and shock information which allows you to spot anomalies in trends and detect indications of developing faults before they result in costly failures and unplanned downtime.

Sensor to Gateway Transmit Power (mW)


- 10x more transmit power to ensure superior radio link reliability
- Significantly more volume of data communication (not constrained by battery power)
- Less machine maintenance (no need for battery replacement)
- No battery temperature constraints

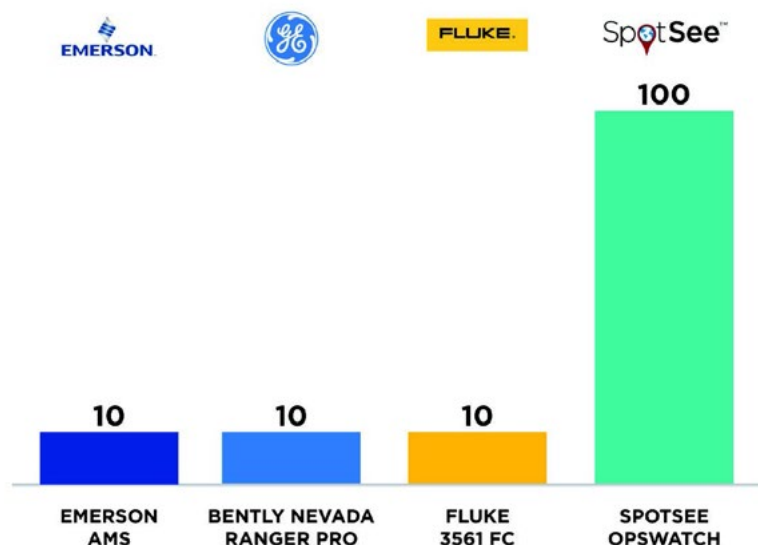




Vibration Lowest Frequency (Hz)

- Lowest frequency floor enables monitoring a wider class of equipment including slowly rotating equipment
- Lower frequency vibrations have higher damage potential

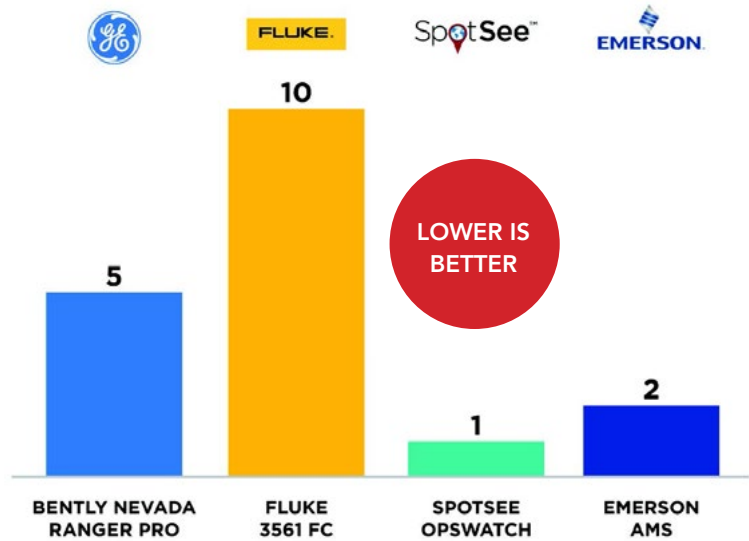

Velocity Range (cm/s)


- **40x** times greater velocity range available than competitive set
- Scale Range: 1cm/s to 200cm/s provides measurements as small as 7mm/s up to 2000mm/s
- FFT Analysis Capability – Streaming data can be analysed in FFT or PSD formats

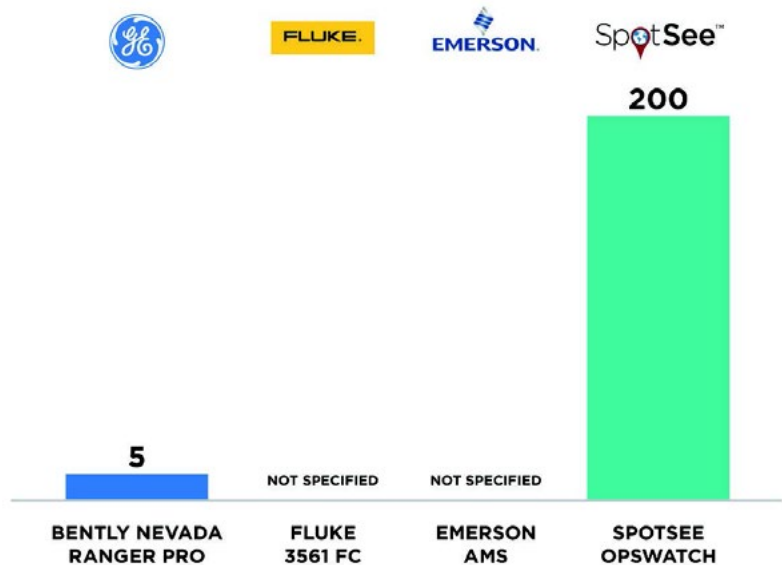



Case Rating (IP Rating)

- Battery life is 1.5 times longer than nearest competitor
- Two AA batteries results in small and extremely robust form factor
- Alkaline batteries can be used where lithium battery use is restricted
- External power connector enable use of mains power for extended service life

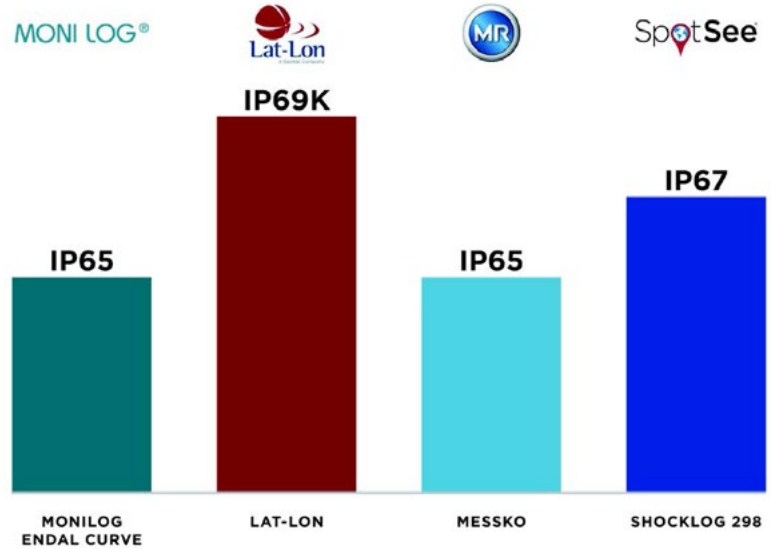



	BENTLY NEVADA RANGER PRO	FLUKE 3561 FC	EMERSON AMS	SPOTSEE OPSWATCH
Vibration Range (± G)	20	32	100	200
Vibration Accuracy (over full range)	10%	5%	5% (partial range)	10%
Low Vibration Frequency (Hz)	5	10	2	1
Vibration Highest Frequency	4000 Hz	1000 Hz	1000 Hz	1000 Hz
Number of Axis	3	3	3	3
Velocity Range (cm/s)	5	Not specified	Not specified	200*
Measurement Interval	Constrained by battery life	Constrained by battery life	Unconstrained on ext. power	Unconstrained
Sensor Temperature Range	-30° to +85°C (but operation above 30°C severely reduces battery life)	-30° to +85°C (but operation above 30°C severely reduces battery life)	-40° to +85°C (without LCD screen) -20° to +80°C (with LCD screen)	-40° to +85°C
Full System (Sensor + Gateway) Temperature Range (Low) (°C)	-40°	-25°	-40°	-40°
Full System (Sensor + Gateway) Temperature Range (High) (°C)	65°	65°	70°	85°
Minimum System Configuration	1 Sensor + 1 Gateway	1 Sensor + 1 Gateway	1 Sensor + 1 Gateway	Single unit
System Parts	2	2	2	1
Sensor Power	Lithium Battery 3.6V	Lithium Battery 3.6V	Lithium Battery/Mains	Mains
Sensor Battery Life	Weeks to months (but operation at elevated machine temperatures severely reduces battery life)	Weeks to months (but operation at elevated machine temperatures severely reduces battery life)	Years at room temp with highly constrained readings per hour (weeks to months with operation at elevated machine temperatures)	Unlimited - no battery required
Sensor to Gateway Link Type	ISA100.11a	BlueTooth Low Energy	IEC62591	No link required
Sensor to Gateway Frequency Band	2.4 GHz	2.4 GHz	2.4 GHz	No sensor-to-gateway radio required
Sensor to Gateway Transmit Power (mW)	10	10	10 18 (optional)	100
Sensor to Gateway Security	AES 128-bit	AES 128-bit	AES 128-bit	No link required
Sensor to Gateway per-country Radio Certification Required	Yes	Yes	Yes	No
Environmental	IP67 dust/water resistant	IP67 dust/water resistant	IP66 Intrinsically safe	IP67 dust/water resistant Intrinsically safe (optional)
Internet Connectivity	Ethernet (cabled)	WiFi	WiFi	WiFi

*Future option



	BENTLY NEVADA RANGER PRO	FLUKE 3561 FC	EMERSON AMS	SPOTSEE OPSWATCH
Uplink Frequency Band	N.A. (wired)	2.4 GHz	2.4 GHz	2.4 GHz
Uplink Power Source	Mains	Mains	Mains	Mains
Uplink Operating Temperature	-40° to 65°C	-25° to 65°C	-40° to 70°C	-40° to 85°C
Uplink Security	N.A. (wired)	WPA2/AES	N.A. (wired)	WPA2/AES
Uplink RF Transmit Power	N.A. (wired)	100mW	N.A. (wired)	100mW
Uplink Range	Limited by ethernet cable length	100m line-of-sight	Limited by ethernet cable length	100m line-of-sight
Uplink per-country Radio Certification Required	N.A. (wired)	Yes (WiFi module)	Yes	Yes (WiFi module)
Intrinsically Safe	Yes	No	Yes	Yes
Temperature Measuring Range	Full operating range	Full operating range	Full operating range	Full operating range
Temperature Resolution	0.1° C	0.1° C	Unspecified	0.1° C
Temperature Accuracy (over full operating range)	Unspecified	Unspecified	+ - 2° C	+ - 2° C
Installation Time	Unspecified	Less than 1 hour	Unspecified	Less than 1 hour
Sensor Size (inches)	3.46 x 1.57 x 1.57	2.42 x 0.95 x 1.1	5.51 x 4.2 x 12.43	4.8 x 3.1 x 2.2 (excluding antenna)
Sensor Length (inches)	3.46	2.42	5.51	4.8
Sensor Width (inches)	1.57	0.95	4.2	3.1
Sensor Height (inches)	1.57	1.1	12.43	2.2
Gateway Length (inches)	9.5	2.26	6.72	0
Gateway Width (inches)	8.66	1.55	9.02	0
Gateway Height (inches)	5.27	1.82	15.54	0
Gateway Size (inches)	9.5 x 8.66 x 5.27 (excluding antenna)	2.26 x 1.55 x 1.82	6.72 x 9.02 x 12.03 (excluding antenna)	No gateway required
Subscription terms	Unspecified	Annually	Unspecified: gateway licence required	Annually

