





# ShockLog 298 Impact Recorder Competitive Comparison

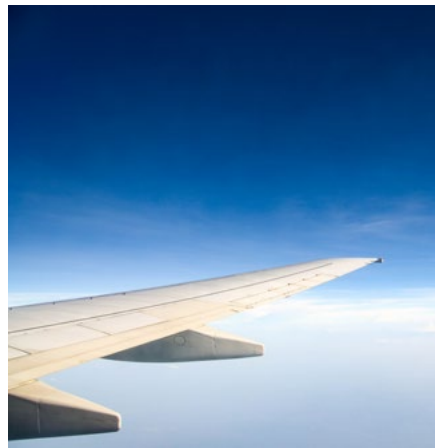

The ShockLog 298 monitors and records shock, vibration, and environmental conditions experienced by any type of structure or equipment, whether in use, in transit, or in storage.

## Sample Rate (Samples per second)

- High sample rate enables higher frequency resolution of shock (acceleration) events
- Continuously sampling analog peak-hold circuit ensures peak shock (acceleration) values are accurately captured
- User programmable low-pass filtering provides capability to filter out short duration impacts that do not cause damage

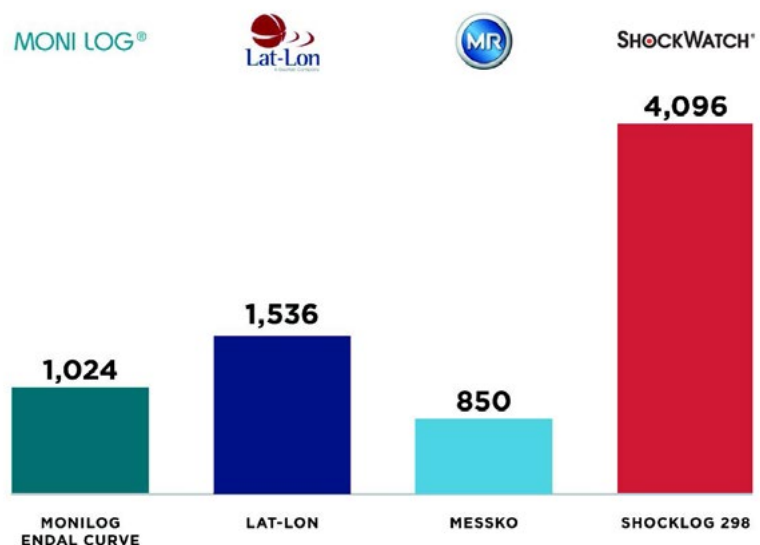




## Battery Life (Days)

- Battery life is 1.5 times longer than nearest competitor
- Two AA batteries results in small and extremely robust form factor
- Alkaline batteries can be used where lithium battery use is restricted
- External power connector enable use of mains power for extended service life



## Acceleration Range (+/- g)

- Acceleration events greater than 30g regularly occur in the supply chain
- User programmable acceleration ranges provide customer maximum flexibility versus fixed acceleration range set at time of purchase

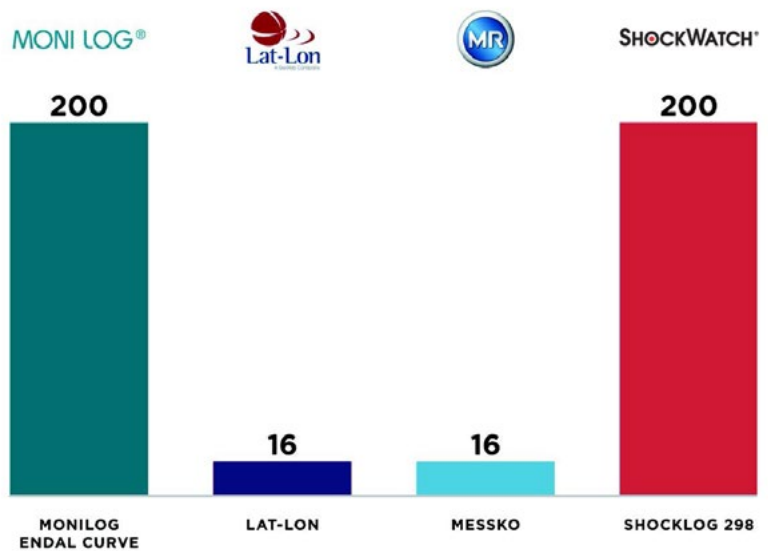



## Case Rating (IP Rating)

- Battery life is 1.5 times longer than nearest competitor
- Two AA batteries results in small and extremely robust form factor
- Alkaline batteries can be used where lithium battery use is restricted
- External power connector enable use of mains power for extended service life

