




# SpotBot GL

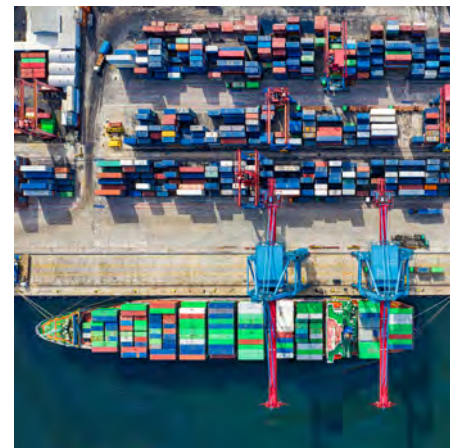

- Access to data from anywhere with a dedicated web portal
- Real-time reporting and tracking of incidents
- Alarms with location, time, impact g-level, direction of impact and temperature and humidity
- Impacts-over-time visualisation of each asset
- Histogram of asset impacts
- Temperature-humidity over-time graph

Supply chain transparency is critical in running an effective operation. Track and protect your assets from damage causing conditions with the SpotBot GL.

The SpotBot® GL is the ideal solution for connecting you to your supply chain. Delivering tri-axial impact, temperature, and humidity monitoring along with location tracking, the SpotBot connects you to your assets via the SpotSee Cloud. Log-in to see the status of your shipment and receive alerts throughout its journey.

## Features

### Best in Class Impact Data

Companies around the world depend on SpotSee for impact monitoring solutions. The SpotBot GL measures impacts between 3 and 100G, meaning

that it can be used to monitor a broad spectrum of assets from medical devices to automotive parts to power generation equipment. Additionally, the accuracy of the SpotBot's temperature and humidity sensors is ideal for monitoring sensitive biotech, pharmaceutical, or diagnostics products.

### Longest Battery Life

A connected supply chain monitor is not valuable if it stops recording halfway through the journey. The SpotBot GL battery will last between 0.5 and 4.5 years, depending upon the reporting interval. With long battery life, users do not need to worry about missing important information or constantly changing out batteries.



## Accurate Location Data

SpotBot GL employs three different approaches to provide the most accurate location reporting available at any given time. The device will utilize GPS or proximity to WiFi signals or cellular towers to deliver location information. The SpotBot also has geofencing capabilities, so that users are notified when an asset reaches its destination.

## Global Communication Capabilities

The SpotBot GL communicates via the 4G LTE cellular network. This network provides better power efficiency and signal range than 4G LTE, making it an ideal solution to monitor assets moving around the globe. In addition, the SpotBot can be configured to recognize and communicate via known WiFi networks.


## Easy to Use

The SpotBot GL unit and trip settings are configured via a simple web application. Information from each trip is stored in the secure SpotSee Cloud and can be easily downloaded to provide the time, location, and severity of excursions experienced during transit.

## SpotSee Cloud Features


### Timely reporting of unacceptable conditions

Example: Monitor your shipment's temperature, humidity and impact.

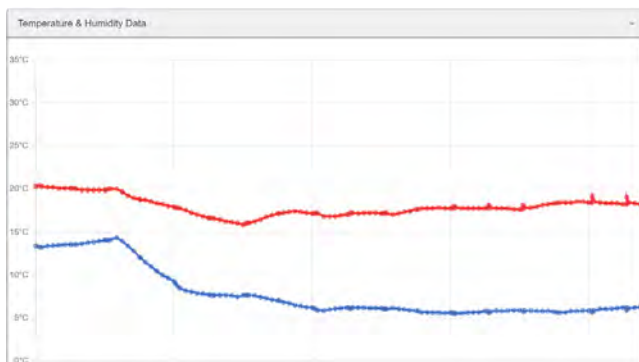

### Reporting functions to summarize location and condition of shipments

Example: View impact events details, including location and time.

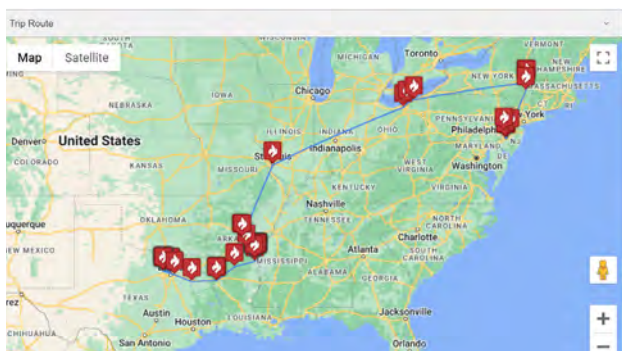

SpotSee		Impacts					
Unit ID	Timestamp	X (g)	Y (g)	Z (g)	Magnitude (g)	Location	Location Timestamp
SP100051	2023-07-04 02:51	12.80	12.60	10.90	20.89	<a href="#">View Map</a>	2023-07-04 02:51
SP100051	2023-06-29 00:39	18.20	4.40	2.40	18.88	<a href="#">View Map</a>	2023-06-29 00:39
SP100051	2023-06-28 22:09	0.40	10.80	18.80	21.51	<a href="#">View Map</a>	2023-06-28 22:09
SP100051	2023-06-19 22:56	10.40	3.10	33.70	36.40	<a href="#">View Map</a>	2023-06-19 22:56
SP100051	2023-06-14 00:45	25.70	19.70	67.60	84.88	<a href="#">View Map</a>	2023-06-14 00:45
SP100051	2023-06-13 00:00	23.90	3.20	4.00	24.35	<a href="#">View Map</a>	2023-06-13 00:00
SP100051	2023-06-12 22:36	10.70	19.30	23.10	23.19	<a href="#">View Map</a>	2023-06-12 22:36
SP100051	2023-06-09 23:33	14.40	13.10	11.00	22.68	<a href="#">View Map</a>	2023-06-09 23:33
SP100051	2023-06-09 23:30	26.40	7.90	38.30	47.18	<a href="#">View Map</a>	2023-06-09 23:30
SP100051	2023-06-09 23:30	10.10	1.80	0.40	10.27	<a href="#">View Map</a>	2023-06-09 23:30
SP100051	2023-06-09 23:30	10.70	0.00	3.10	16.99	<a href="#">View Map</a>	2023-06-09 23:30
SP100051	2023-06-09 23:30	10.10	1.80	0.40	10.27	<a href="#">View Map</a>	2023-06-09 23:30
SP100051	2023-06-09 23:30	10.20	1.10	3.40	10.81	<a href="#">View Map</a>	2023-06-09 23:30
SP100051	2023-06-09 23:19	0.70	4.90	11.10	13.15	<a href="#">View Map</a>	2023-06-09 23:19
SP100051	2023-06-09 23:25	10.50	1.30	3.30	11.08	<a href="#">View Map</a>	2023-06-09 23:25
SP100051	2023-06-09 21:44	14.80	4.80	0.30	15.56	<a href="#">View Map</a>	2023-06-09 21:44
SP100051	2023-06-09 13:38	2.10	6.60	10.30	12.41	<a href="#">View Map</a>	2023-06-09 13:38



## Specifications

Measured Parameters	Impact, Temperature, Humidity, and Location
Acceleration Range	3G to 100G
Acceleration Filter Bandwidth	200 Hz
Temperature Range	-20°C to 60°C
Temperature Accuracy	+/- 0.5°C
Humidity Range	10-90% RH
Humidity Accuracy	+/- 2% RH
Sample Rate (Temperature / Humidity)	15 minutes to 24 hours (programmable)
Reporting Interval / Battery Life	1 hour/0.5 year 2 hours/1 year 4 hours/1.8 years 8 hours/2.8 years 12 hours/3.5 years 24 hours/4.5 years
Communication Technology	4G LTE, WiFi
Location	GPS, Nearest Cell Tower, Nearest WiFi
Dimensions	131 mm x 39 mm x 46 mm
Weight	189 gm
Mounting Options	Screw Mount / Adhesive / Magnetic Feet (Optional)
Battery Type	Lithium Battery Pack